

A Memetic Approach to Vehicle Routing Problem with Dynamic Requests

Jacek Mańdziuk^{a,b,*}, Adam Żychowski^a

^a*Faculty of Mathematics and Information Science, Warsaw University of Technology,
Koszykowa 75, 00-662 Warsaw, Poland*

^b*School of Computer Engineering, Nanyang Technological University,
Block N4, Nanyang Avenue, Singapore 639798*

Abstract

The paper presents an effective algorithm for solving Vehicle Routing Problem with Dynamic Requests based on memetic algorithms. The proposed method is applied to a widely-used set of 21 benchmark problems yielding 14 new best-know results when using the same numbers of fitness function evaluations as the comparative methods. Apart from encouraging numerical outcomes, the main contribution of the paper is investigation into the importance of the so-called *starting delay* parameter, whose appropriate selection has a crucial impact on the quality of results. Another key factor in accomplishing high quality results is attributed to the proposed effective mechanism of knowledge transfer between partial solutions developed in consecutive time slices. While particular problem encoding and memetic local optimization scheme were already presented in the literature, the novelty of this work lies in their innovative combination into one synergetic system as well as their application to a different problem than in the original works.

Keywords: vehicle routing, memetic algorithm, optimization under uncertainty, scheduling, dynamic optimization

*Corresponding author
Email address: `mandziuk@mini.pw.edu.pl` (Jacek Mańdziuk)

1. Introduction

Vehicle Routing Problem (VRP), first introduced by Dantzig and Ramser in [1], is an NP-hard combinatorial optimization problem with many practical applications. In its classical formulation a set of customers must be served by a fleet of homogenous vehicles (with some pre-defined capacity) with routes beginning and ending at a specified depot. The optimization goal is to minimize the total routes' length/cost of all vehicles. Due to the VRP's combinatorial complexity the exact solution methods proved inefficient, except for simple problems. Therefore most of the research effort was devoted to application of metaheuristic algorithms, for instance Ant Colony Optimization (ACO) [2], Tabu Search (TS) [3], Genetic Algorithms (GA) [4], Simulated Annealing (SA) [5] or Upper Confidence Bounds Applied to Trees (UCT) [6], with promising results.

In majority of practical applications, however, another dimension related to stochastic nature of the real-life problems is added to the problem's formulation. In particular, the information available at the beginning may change during the solution execution, for instance due to the arrival of new customers' orders [7, 8] or because of the changes in their requested demands [9] or because of unplanned events, e.g. traffic jams/road congestion [10, 11] or, more generally, due to stochastic travel times [12]. This intrinsic stochasticity of the practical VRP realizations led to the extension of the static VRP to a class of Dynamic Vehicle Routing Problems (DVRP), solving which requires adequate on-line routes' adjustment in response to the arrival of new problem-related information.

Furthermore, in the literature there are many variants of the VRP which are formulated so as to serve specific practical needs, e.g. its multi-trip [13] or multi-compartment [14] versions, variants with specific time-windows for delivery [15], formulations which combine delivery with picking up goods from the clients [16], and many others (see the recent special issue [17] for an overview of the current developments and challenges in this domain and [18] for the VRP taxonomy).

This paper considers a version of DVRP in which some of the customers'

locations (and their associated requests) are unknown at the start of the solving method and arrive gradually as time passes, i.e. during the algorithm execution. In the literature, this version of DVRP is known as Vehicle Routing Problem with Dynamic Requests (VRPDR). The intrinsic partial information uncertainty
35 of VRPDR is usually handled in the way proposed by Kilby et al. [8], which consists in executing the route optimization procedure only at the end of pre-defined fixed time intervals - called *time slices*.

In general, the algorithms applied to solving VRPDR are similar to those used for VRP. In particular, Computational Intelligence methods, e.g. ACO [19],
40 TS [20], GA [20] or PSO [21, 22], have been applied to the problem with some success. Specifically, the PSO based approaches [23, 24, 22, 25], seem to be very well suited to the type of dynamic changes introduced to requests' distribution observed in VRPDR. This issue is further discussed in Section 5 devoted to presentation of experimental results.

45 The approach proposed in this paper is based on Memetic Computing (MC) [26, 27], which is currently one of the fastest growing subfields of Evolutionary Computing research. In short, MC enhances population-based Evolutionary Algorithms (EA) by means of adding a distinctive local optimization phase. The underpinning idea of MC is to use domain knowledge or local optimization
50 techniques to improve potential solutions (represented by individuals in a population) between consecutive EA generations. A synergetic combination of simple local improvement schemes called *memes* with evolutionary operators leads to complex and powerful solving paradigm, applicable to a wide range of problems [28].

55 MC has been applied to several variants of transportation problems, in particular the static VRP version [29, 30] or the Vehicle Routing Problem with Stochastic Demands (VRPSD) [9]. However, to the best of our knowledge, this paper presents the first attempt to solving VRPDR with MC. On the other hand our approach, to some extent, follows the above-cited work of Chen et al.,
60 even though the problems considered in these two papers are quite different. In VRPSD, unlike in VRPDR, all customers' locations are known in advance (at

the start of the method) but customers' demands are stochastic, i.e. the size of demand is known only after the vehicle's arrival. Hence, the main focus of the solution method is to ensure that a planned route would not exceed vehicle's capacity.

Another paper that inspired our work is [20] where simple but powerful chromosome representation and genetic operators were proposed. While a unique combination of the MC scheme adopted from [9] with solution representation proposed in [20] proved to be superior over each of the two components alone, the respective results were, anyway, not better than those accomplished with the 2MPSO (Two-Phase Multiswarm PSO) method [22, 25]. Only after the proposed method was enhanced by a suitable *starting delay* mechanism and the effective way of *knowledge transfer between consecutive time slices*, the final results yielded by the system excelled those of 2MPSO in terms of the average performance and the best minima found.

The main contribution of this paper, except for finding new best-literature results for popular benchmarks is investigation into the saliency of the *starting delay* parameter. Another key issues are introduction of a new effective way of knowledge transfer between consecutive time slices by means of a specific population generation scheme, as well as, introduction of a new mutation operator in the memetic optimization procedure. The novelty of this work also lies in the innovative synergetic combination of (already known in the literature) problem encoding and memetic optimization and their application to a new problem from VRP domain.

The remainder of this paper is arranged as follows. Section 2 presents the VRPDR definition and discusses its practical relevance. In Section 3 general overview of the system's construction, its main principles, as well as basic components (each in a dedicated subsection) are presented. Section 4 provides benchmarks description, discussion on experimental methodology and parameters' selection. In Section 5 experimental results are presented and discussed in the context of the best literature solutions, in particular those accomplished with the 2MPSO algorithm [21, 22, 25]. Performance analysis of the proposed

system and discussion on its suitability for particular types of benchmark sets are also placed in this section. The next section elaborates on the pertinence of the local memetic optimization component and the saliency of the method's steering parameters. The last section is devoted to conclusions and directions for future research.

2. Definition of VRPDR

VRPDR is a generalization of the Traveling Salesman Problem. In this problem a fleet of m homogenous vehicles, each with identical capacity c , and the set of n customers $\{v_1, v_2, \dots, v_n\}$ are considered. VRPDR can be modeled using an undirected graph $G = (V, E)$, where $V = \{v_0, v_1, \dots, v_n\}$ is the vertex set and $E = \{(v_i, v_j) : v_i, v_j \in V, i < j\}$ is the edge set. Each vertex $v_i, i = 1, \dots, n$ represents the respective (i -th) customer and v_0 denotes a depot. Each edge $e_{ij} = (v_i, v_j), i, j = 0, \dots, n$ has an associated weight which represents the cost or, alternatively, a distance between v_i and v_j being either two customers or a customer and the depot. Furthermore, for each customer v_i the demand d_i , the unload time ut_i (which is the time required to unload cargo at customer's v_i) and t_{v_i} - the time of arrival of the order from customer v_i , are defined. Depot v_0 has the opening time t_o and closing time t_c , ($0 \leq t_o < t_c$) specified. The speed of each vehicle is defined as one distance unit per one time unit.

The goal of VRPDR is to minimize the total routes' length of all vehicles according to the following constraints:

- each vehicle has to start from a depot after time t_o and end its route in a depot before time t_c ,
- every customer has to be served exactly once and by one vehicle,
- time of a vehicle's arrival to customer v_i has to be greater than t_{v_i} for all i ,
- the sum of customers' demands assigned to each vehicle must not exceed vehicle's capacity c .

VRPDR combines two NP-Complete problems: Bin Packing Problem (to assign requests to vehicles) and Traveling Salesman Problem (to minimize the tour length of each vehicle). The problem is widely applicable to real-life tasks, such as taxi services, courier companies or other pickup and delivery businesses. 125 The Global Positioning System and the widespread use of mobile phones create opportunity for companies to track and manage their fleet in real time, thus making the VRPDR a highly relevant problem of practical importance.

3. Components of the system

Our system designed to solving the VRPDR is composed of two main components. 130 The first module is responsible for receiving new orders, dividing working day into some pre-defined number of time slices and creating static instances of the VRP for each of them. The second component is responsible for optimizing the routes by means of solving a (static) VRP instance in each time slice. To this end a GA implementation following Ombuki-Berman et al. paper [20], 135 enhanced with the local memetic optimization [9] is proposed.

3.1. Time slices

Following [8] and many other subsequent papers, a working day is split into n_{ts} equal-length time slices and in each time slice a static version the problem (VRP) is solved for the set of currently known customers (requests). 140 New requests arriving during the current time slice are postponed to its end and optimized in the next algorithm's run (in the next time slice).

Once the calculations allotted for a given time slice are completed the best-fitted chromosome is selected, decoded and the vehicle routes it represents are examined. Roughly speaking, if the time-span of a planned route allows for 145 a "safe time reserve" the vehicle is not moving as it is generally beneficial to wait for another time slice and include newly-arrived requests in the planned solution. Certainly, waiting for too long poses the risk of not being able to extend the route in future time slices by adding new customers as completing the route before the required time t_c would not be possible.

150 Efficient addressing of the above trade-off is one of the most salient issues in
the proposed solution method. To this end the so-called *starting delay* ($Sd, 0 \leq$
 $Sd \leq 1$) is defined as the fraction of a working day time ($t_c - t_o$) in which the
planned route must be completed. The remaining time, i.e. $(1 - Sd)(t_c - t_o)$,
serves as a time reserve for the future route modifications which may possibly
155 be required. Hence if, for a given vehicle, a planned return time to the depot
is greater than $Sd(t_c - t_o)$ the vehicle is moving to the first unserved customer
on the assigned route. The customers already visited and the ones to whom
the vehicle is already dispatched are removed from the chromosome and called
committed. If the currently planned route's time does not exceed $Sd(t_c - t_o)$
160 the vehicle is waiting at its current location (either in the depot or at the last
customer's) and no customers assigned to it are removed from that chromosome.

The new population (in the next time slice) consists of the copies of the
best chromosome from the previous time slice extended by adding the newly-
arrived demands (customers). Each new customer (that appeared during the
165 previous time slice) is placed at the end of a route of a randomly chosen vehicle,
independently for each chromosome.

Figure 1 outlines the schematic workflow of the algorithm within each time
slice.

3.2. Chromosome representation and initial population

170 We use chromosome representation proposed in [20] in which chromosomes
are integer vectors of variable length. Positive genes represent clients' identifiers
and negative ones correspond to vehicles. Each chromosome contains all and
only those identifiers of customers' requests which had already been received
(are known to the system) but have not yet been served or committed to any
175 vehicle.

A solution is decoded from a chromosome by scanning it from left to right.
Each customer is assigned to a vehicle represented by the last negative number
located before that customer's id. In other words, all customers between the
two negative identifiers are allocated to the vehicle represented by the first of

```

for all time slices do
    {for the chromosome  $S_{ts}$  representing the current best solution}
    dispatch vehicles whose planned return time exceed  $Sd(t_c - t_o)$  [sec. 3.1]
    remove committed customers from  $S_{ts}$  [sec. 3.1]
    add new customers that appeared during the previous time slice to  $S_{ts}$  [sec. 3.1]
    create new population based on  $S_{ts}$  [sec. 3.1]
    for all number of generations do
        perform evolutionary operators to solutions:
        genetic crossover [sec. 3.3]
        genetic mutation [sec. 3.4]
        memetic optimization [sec. 3.5]
        selection [sec. 3.1]
    end for
    choose the best chromosome  $S_{ts}$  as the base solution for the next time slice
    [sec. 3.1]
end for

```

Figure 1: Actions performed during each time slice.

180 them.

If a given vehicle does not have enough capacity to accommodate all assigned customers or the time required for completion of a planned route with assigned customers is too long (the vehicle would not be able to return to the depot before the closing time t_c), a new vehicle is inserted to a chromosome just before the
185 customer that breaks either the capacity of time constraints. Similarly, if a chromosome begins with a positive number (customer's id) the new vehicle is added as the first element in the chromosome.

Thanks to this automatic repairing procedure (which is applied before each evaluation or potential modification of a chromosome) there is no possibility that
190 a chromosome would represent incorrect solution in any phase of the algorithm.

An example of chromosome representation and its decoding is presented in Figure 2. A chromosome is encoding 8 customers' demands (positive identifiers from 1 to 8) and 4 vehicles (negative identifiers from -1 to -4). Since the

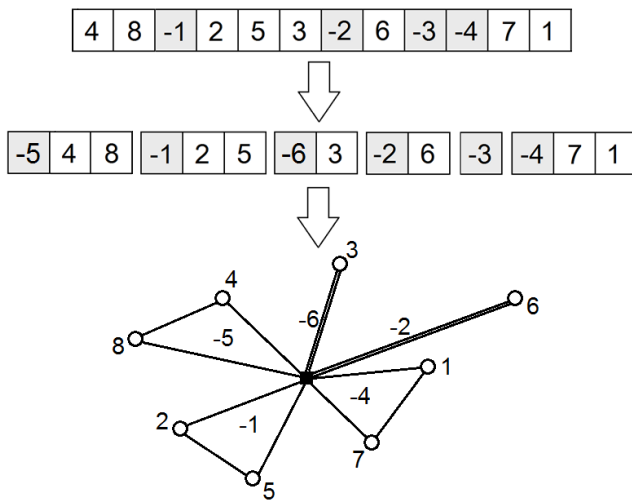


Figure 2: Chromosome representation and solution decoding.

first element of a chromosome is positive, a new vehicle (with id. -5) is added
 195 immediately before this element. Orders for customers 4 and 8 are assigned to
 a planned route for this vehicle, assuming that these requests do not violate
 capacity constraint. Next we move to another vehicle's id., i.e. -1 and the
 requests assigned to it. Suppose that the first two customers (2 and 5) do not
 violate the capacity constraint, but adding the third one (3) would have caused
 200 exceeding this limit. In such a case a new vehicle (with id. -6) is inserted
 just before the customer 3, so as to serve this customer as (at the moment) the
 sole element of its route. The remaining part of a chromosome is decoded in a
 similar way based on the above mentioned principles. It should be noted that
 there is a possibility that a vehicle may have no orders assigned, as vehicle -3
 205 in our example.

The initial population is composed of chromosomes that represent all de-
 mands known at the beginning of a day, i.e. those which arrived after the
cut-off time of the previous day (see benchmark sets' description in sec. 4.1
 for a detailed explanation of this parameter's meaning). Each chromosome is
 210 defined as a random permutation of these requests. Hence, at the start of the

algorithm all chromosomes have the same length and contain the same numbers (customers' identifiers). Please recall that before the first GA operation (the crossover) all chromosomes will be verified against fulfilling the capacity and feasibility rules described above, and "fixed" (if necessary) by adding an appropriate number of vehicles.

3.3. Crossover

Our first attempt was to apply crossover operators proposed by Chen et al. [30], but the results were not satisfactory. Therefore, after some limited number of trials we decided to implement the Best-Cost Route Crossover scheme proposed in [20], which yielded much more competitive solutions.

In the Best-Cost Route Crossover two parents $p1$ and $p2$ are selected from the population and fixed by applying the repairing procedure. Then two routes $r1$ and $r2$ are randomly selected from $p1$ and $p2$, respectively and the customers assigned to $r1$ are deleted in $p2$ likewise those belonging to route $r2$ are extracted from $p1$. Next, the customers that have been removed are reinserted, one after the other, to their parent chromosomes at the locally optimal positions, i.e. in a way that locally minimizes the overall length of the entire set of routes of all vehicles. Please note that even though this type of crossover is quite expensive since it requires examining every position in a chromosome as a potential destination for the reinserted customer, the running time of the algorithm on a single PC does not exceed 10 minutes (24 seconds per time slice, in average). An example of crossover is presented in Figure 3.

3.4. Mutation

Mutation is applied with some probability and mutation operator, for a given chromosome, can take one of the three following forms:

- inversion - two points in a chromosome are randomly selected and all elements between these points are reversed (see Figure 4),
- insertion - a randomly chosen element is removed from a chromosome and then inserted in a randomly selected position,

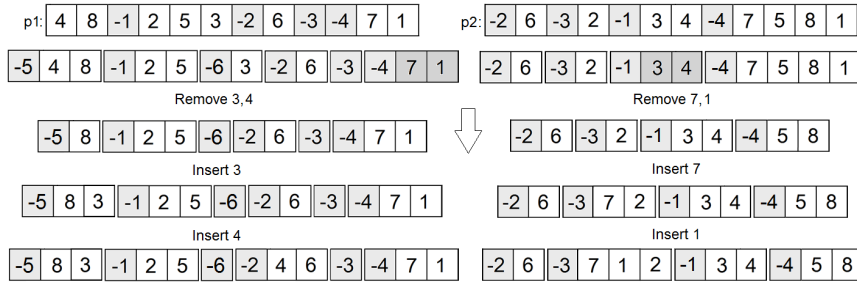


Figure 3: An example of the Best-Cost Route Crossover enhanced with the repairing scheme. First the initial chromosomes are “fixed” based on capacity and feasibility rules. Then the routes of vehicles -4 and -1 are selected in p_1 and p_2 , respectively and afterwards the respective customers (3, 4 in p_1 and 7, 1 in p_2) are reinserted in a greedy manner.

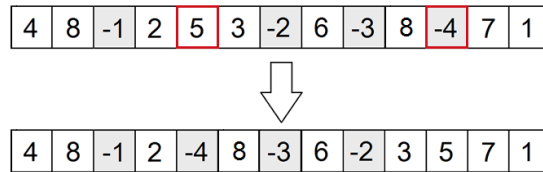


Figure 4: An example of inversion mutation for elements 5 and -4 . The order of genes [5, 3, \dots , -4] is reversed.

- 240
- swap - two adjacent elements are exchanged.

A particular form of mutation is selected at random with equal probability of occurrence ($= \frac{1}{3}$) of each of the above-listed three versions. It is important to note that in all cases there is no distinction between genes representing vehicles and customers.

245 *3.5. Memetic optimization*

Memetic optimization is a kind of a local enhancement process which uses problem-related knowledge to improve the solution. Our implementation of memetic optimization adapts the idea of Self-Adaptive Memplex Individual Learning proposed in [9]. The local improvement algorithm is controlled by

250 memes. Each meme serves as a single instruction for local optimization and is

composed of three elements:

- move operator $T_i, i = 1, \dots, 6$,
- acceptance strategy A ,
- search depth D .

255 A move operator implements one of the following schemes:

T_1 : a randomly selected customer is removed from a vehicle and reinserted into a newly-added vehicle;

T_2 : two randomly selected customers from two different vehicles are swapped;

T_3 : two randomly selected sub-routes from two different vehicles are swapped;

260 T_4 : routes of two randomly selected vehicles are merged into one route / vehicle;

T_5 : a randomly selected customer is removed from a vehicle and reinserted into another vehicle at a random position;

265 T_6 : two customers in the same vehicle are randomly selected and the order of all elements located between these customers is reversed.

Each meme uses one of the following two acceptance strategies A :

- first improvement - memetic optimization is stopped after the first improvement is obtained;
 - best improvement - memetic move operator is called D times and the best improvement found in these D trials is chosen and applied.
- 270

In both above strategies, if D trials of applying meme's move operator did not lead to finding any improvement to the current solution, the chromosome would remain unchanged.

Each chromosome maintains a separate set of n_m memes. For each chromosome and for each meme in that chromosome one of the six move operators T_i and one of the two acceptance strategies A are randomly and independently chosen with uniform probability (equal to $\frac{1}{6}$ and $\frac{1}{2}$, respectively). Search depth D is common for all memes in all chromosomes.

The order of memes' application in the memetic improvement phase depends on a synergy matrix W . W is $n_m \times n_m$ matrix unique for each chromosome. Its elements w_{ij} represent the connectivity from meme m_i to meme m_j ¹. During memetic optimization phase, after applying meme m_i the next meme m_j is chosen according to the following probability $P_a(m_i, m_j)$:

$$P_a(m_i, m_j) = \begin{cases} \frac{w_{ij}}{\sum_{\mu=1}^{n_m} w_{i\mu}} & m_i = \emptyset \\ \frac{w_{ij}}{\sum_{\mu=1}^{n_m} w_{i\mu}} & \text{otherwise} \end{cases}$$

Initially matrix W is composed of all ones. After each application of m_i followed by application of m_j the element w_{ij} is updated according to the following rule:

$$w_{ij} = \gamma w_{ij} + \frac{c_j}{t_j}$$

where c_j is the solution improvement caused by application of meme m_j , t_j is a computational cost of applying meme m_j , γ , $0 < \gamma < 1$ is a discount factor, which specifies the influence of a meme's recent performance over the past. Consequently, the higher the improvement c_j and the lower the cost t_j of applying meme m_j *immediately after* meme m_i , the higher the probability of selection of m_j as the subsequent meme right after m_i .

A pseudocode of memetic optimization procedure is shown in Figure 5. The selection and application of meme m_j , as well as updating matrix W are repeated until the recently applied meme did not provide any solution improvement ($c_j = 0$) and the exponential ratio between the cumulative improvement and computational cost (of all applied memes) is relatively high ($rand(0, 1) > \exp(-\frac{t}{c})$). Please observe, that application of meme m_j in line 5 denotes repetitive, multiple-time use of its move operator T until the first improvement occurs or the number of trials exceeds D , depending on the particular acceptance strategy A associated with meme m_j . Whenever chromosomes undergo mutation / crossover operation the respective matrix / matrices are also

¹For the sake of clarity of the formulas the connection between matrix W and a chromosome it is assigned to will be omitted. Unless otherwise stated, in all contexts matrix W will refer to the currently considered chromosome.

```

c = t = 0
m_prev = ∅
while true do
  select next meme m_j with probability P_a(m_prev, m_j)
  apply m_j and get feedback information c_j and t_j
  update w_ij based on c_j and t_j
  c += c_j
  t += t_j
  if c_j == 0 then
    if rand(0,1) > exp(-t/c) then
      break
    end if
  end if
  m_prev = m_j
end while

```

Figure 5: Memetic optimization scheme.

295 modified. More precisely, during the crossover of chromosomes a and b new matrices W_a and W_b are created by random exchange of corresponding elements between parents matrices. For each pair of indices (i, j) the element $W_a[i, j]$ is swapped with the element $W_b[i, j]$ with probability $\frac{1}{2}$.

Mutation of a synergy matrix W_a is realized by adding to each element
300 $W_a[i, j]$ a small perturbation generated from Gaussian distribution $N(0, (\frac{\alpha(a)}{100})^2)$, where $\alpha(a)$ is the average value of all elements in W_a .

In summary, the role of synergy matrix W_a associated with chromosome a is to maintain probability values w_{ij} of applying meme (m_j) immediately after meme (m_i) based on historical gain (high c_j and low t_j) of such application.
305 Mutation and crossover of synergy matrices are applied for the same reasons as in the case of operations on chromosomes, i.e. to avoid stagnation in a local minimum and to maintain diversity.

4. Experimental setup

In this section a set of benchmark problems used to evaluate the quality
310 of the proposed method is introduced, followed by a discussion on method’s
parametrization. In the last subsection the methods used for experimental com-
parison are presented and their selection is justified.

4.1. Benchmark sets

The method was tested on the set of benchmark problems proposed by Kilby
315 et al. [8] and subsequently extended by Montemanni et al. [19]. All of them were
derived from Christofides’ [31], Fisher’s [32] and Taillard’s [33] VRP bench-
marks. The set consists of 21 problems with different characteristics of cus-
tomers locations’ distribution and incoming orders’ schedule. Furthermore, for
each benchmark the so-called *cut-off time* parameter, which defines a fraction
320 of orders that are known at the beginning of the working day, must be set. All
requests that arrive after the *cut-off time* are treated as being known at the
beginning of the working day (as if they were left unserved from the previous
day). The idea of using a *cut-off time* is derived from practical implementations
when the solving system works during several consecutive days. In that case the
325 “late requests” (after the *cut-off time*) are postponed for the next working day.
In our case, as well as in all known to us research papers, one-day solutions are
considered and therefore these “late requests” are treated as being left from the
previous day (hence, are available from the beginning of the day). In majority
of attempts to solving the VRPDR reported in the literature, and also in our
330 tests, the *cut-off time* was set to 0.5, i.e. all requests from the second-half of
a day are known for the scheduling system since its starting time and those
scheduled in the first half of a day will become known to the solving system in
due time.

Two example solutions for the benchmarks *c50D* and *c100bD* are show in
335 Figures 6 and 7, respectively. Please observe very distinct requests distributions
and consequently topologies of the routes in these two data sets. This issue is
further discussed in Section 5.

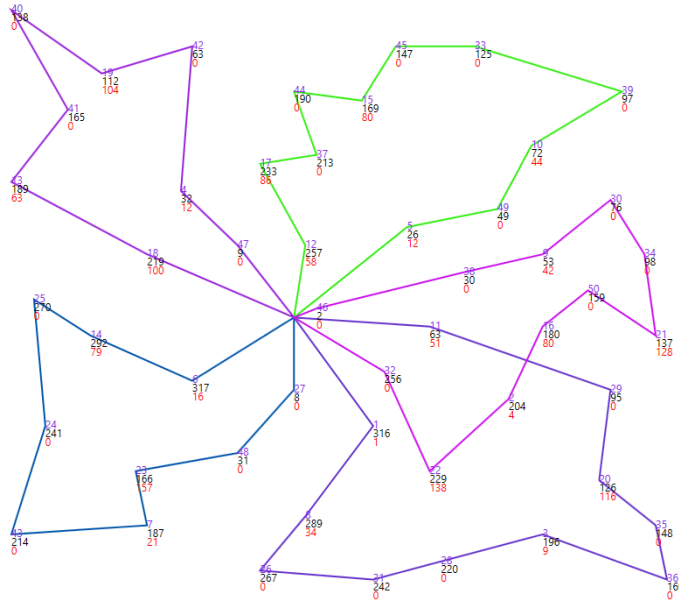


Figure 6: Route networks for instance c50D.

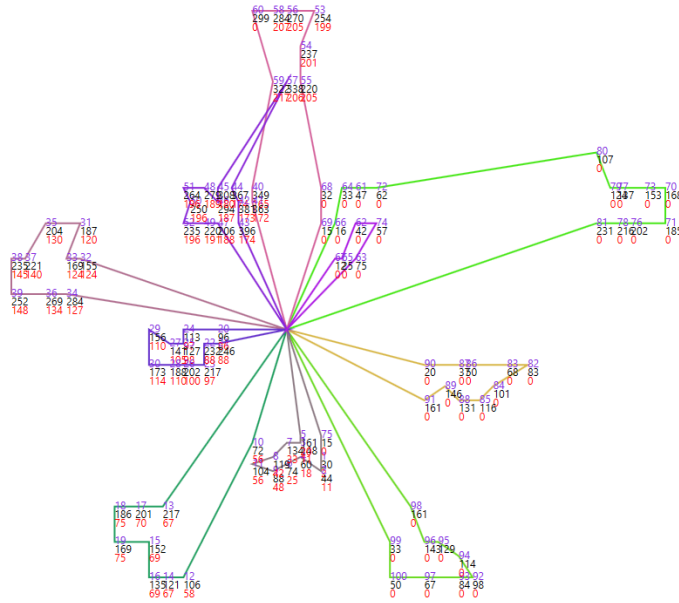


Figure 7: Route networks for instance c100bD.

4.2. Parameters' selection

The parameter which turned out to be the most influential on the solution
340 quality was starting delay Sd . The following values for this parameter were
tested: 0.0, 0.6, 0.75, 0.9, 0.95 and based on the average results from 10 runs
 $Sd = 0.9$ was selected for the final experiments. This value yielded, on average,
0.7% better results than $Sd = 0.95$, 3.7% better results than $Sd = 0.75$, 8%
than $Sd = 0.6$ and over 15% than $Sd = 0.0$. In terms of fitting Sd to particular
345 benchmarks, the value of 0.9 was the best one in 14 cases, followed by 0.95 with
5 wins. For the remaining two sets $Sd = 0.6$ appeared to be the best choice.
The above results indicate that appropriate delay in dispatching the vehicles
has a strong impact on results. Generally speaking, the longer the delay the
better (as the routes can be better optimized), however, increasing Sd beyond
350 a certain threshold leads to deterioration of results (since vehicle routes become
too "tight" or less flexible in a sense that an attempt to add new customer to a
vehicle ends up in violating the time constraint).

Another tested parameter was crossover rate with the potential values of
0.6, 0.7, 0.8 and 0.9, among which 0.8 was selected as the generally best choice.
355 This parameter appeared to be much less significant than Sd as the differences
between the average results across all benchmarks were within 0.26% margin
for all tested values.

Next, the initial tests were performed for various numbers of time slices,
namely 12, 25 and 50. The differences among the resulting routes' lengths, as
360 in the case of the crossover rate, were insignificant. In average, 25 time slices
yielded 0.67% worse results than 50 of them and 3.69% better than 12 time
slices. Due to diminutive differences, this parameter was set to 25 as originally
proposed in [8].

The last two examined parameters were population size and the number
365 of generations, which were tested together in order to keep the number of fit-
ness function evaluations constant. In other words, if the population size was
increased a relative decrease in the number of generations was imposed. The fol-
lowing pairs of (*population*, *generation*) values were tested: (15, 20 000), (30, 10 000)

and (60, 5 000). The best results were accomplished by a combination (15, 20 000)
 370 - the winner in 13 cases, followed by (30, 10 000) - which won in 6 cases and by
 (60, 5 000) which was the winning selection for two benchmarks. Similarly to
 crossover rates, the differences among the tested pairs were insignificant, below
 2%. The final choice of the main algorithm's parameters is presented in Table 1.

Parameter	Value
cut-off time	0.5
population size	15
generation span	20 000
number of time slices	25
starting delay (Sd)	0.9
crossover rate	0.7
mutation rate	0.5
selection type	binary tournament
selection pressure	0.8
number of elite	2
meme search depth (D)	100
number of memes for each chromosome (n_m)	15
discount factor (γ)	0.5

Table 1: Values of the main steering parameters of the algorithm.

375 4.3. Comparative approaches

In our previous works [21, 22, 25] a new approach to solving VRPDR which
 utilizes the Two-Phase Multi-Swarm Particle Swarm Optimization method (2MPSO)
 was proposed. Since the detailed description of the method can be found in the
 above-cited sources, let us here only briefly describe the underpinning concepts
 380 of the 2MPSO algorithm.

In short, in 2MPSO method, similarly to other approaches reported in the

literature, the working day is divided into some number of time slices and in each of them a currently available instance of the (static) VRP is solved. What accounts for the main difference between 2MPSO and majority of the CI-based approaches described in the literature is that in each time slice the solving process of 2MPSO is split into two separate phases: a clustering phase (i.e. assignment of requests to vehicles) and optimization phase (i.e. route construction for each of the vehicles). Each of these two above-mentioned subproblems is solved by a separate multi-swarm PSO system. One of the key features of the 2MPSO is effective knowledge transfer between multiple swarms (in-phase) and between swarms used in consecutive time slices.

In the first phase each particle is represented as a real number vector whose elements denote centers of clusters of requests assigned to vehicles. The area of clients' requests is divided among vehicles on the basis of the Euclidean distances from the client's location to the clusters' centers (i.e. a request is assigned to a vehicle which serves the nearest cluster).

In the second phase each particle represents the order of requests assigned to a given vehicle (each cluster/vehicle is solved by a separate PSO instance). The order is obtained by sorting particles' coordinates in the ascending order. The solution assessment in the second phase (in each of the PSO instances) is equal to the length of a route (of a given vehicle) defined by the proposed ordering. The final cost value is equal to the sum of the assessments of the best solutions found by each of the PSO instances.

In [22] the 2MPSO algorithm was extensively compared with several population-based methods, namely the Ant Colony Optimization [19], evolutionary approach [20], Tabu Search [20] and another, well-established in the literature, PSO-based approach: MEMSO/MAPSO [24, 23, 34] by Khouadija et al. The tests were performed on the same set of benchmarks as those used in this work, described in section 4.1.

On a general note, the extensive experimental comparison proved an upper hand of the 2MPSO approach, which for comparable ($\approx 10^7$) number of fitness function evaluations was capable of finding new best literature solutions in 11

out of 21 test instances. In terms of the average results the 2MPSO outperformed the competitive methods by at least 1.5%. For the sake of clarity of the presentation the experimental results and conclusions drawn in [22] are not repeated in detail here. Due to the superiority of 2MPSO over all the above-listed metaheuristic approaches we will use this method as a reference point to our memetic VRPDR algorithm (M-VRPDR).

5. Experimental results

One of the most universal complexity measures of population-based methods is the number of fitness function evaluations (FFE) of the candidate solutions. This measure allows for making (rough) comparisons between various GA/EA approaches as well as Particle Swarm Optimization or Tabu Search methods. In our method the fitness evaluation is performed in three parts of the algorithm: in crossover operation (in order to find the best position in a chromosome for insertion of removed customer), in selection (so as to choose better-fitted chromosomes for the next generation) and in memetic optimization (to check how the meme operation affects the cumulative length of the vehicle routes). In all baseline numerical results presented in this section the number of FFE in a single algorithm's run is close to (but never exceeds) 10^7 , which is the value used to calculate the main results obtained in [22] for other methods.

Results of experiments with steering parameters set according to Table 1 are presented in Tables 2, 3 and 5. The first table shows the best result and the average result out of 50 independent trials for each of the 21 benchmark sets of our M-VRPDR approach and the 2MPSO method (in both cases with a budget of 10^7 FFE). In terms of the ability to find the best possible solution (Min category comparison) M-VRPDR outperforms 2MPSO by a large margin - winning in 17 benchmarks and losing in 4 cases. In particular, M-VRPDR proved to be better suited for all Taillard's benchmarks.

When comparing the average performance, which in practice is usually more desirable, as it addresses the issue of repeatability and stability of results the

advantage of M-VRPDR is not so prevailing, though the method yielded better averages in 14 test sets, losing in the remaining 7. The memetic approach again showed its upper-hand in the case of Taillard’s instances. The difference
445 in average results between the two methods is statistically significant for p – $value = 0.007$ for 1-tailed t-test for averages and p – $value = 0.015$ for 2-tailed t-test.

Table 3 compares the best results of M-VRPDR with those found in the literature (including the results of 2MPSO). Both results are attained with the
450 same number of FFE. Our method found the new best literature results in 14 cases.

A more detailed results, including the worst outcomes and standard deviations of the 50 tests with M-VRPDR for each of the benchmarks, as well as the exemplar convergence graphs for the sets c100bd and tai150aD are presented in
455 Appendix A.

5.1. Hard cases for the M-VRPDR

Based on the average results presented in Table 2 it can be noticed that the algorithm does not manage equally well for all benchmarks. The worst average results compared to 2MPSO were achieved for instances c100bD and
460 c120D. In these two problems distributions of clients’ locations have the form of highly-spatial clusters composed of uniformly distributed request sizes. Figures 8 and 9 show the routes proposed by our algorithm for c100bD and c120D benchmarks. In both presented solutions there exist routes which include requests from two different clustered groups of clients which elongate the overall
465 solution (if these clusters were served by different vehicles the solutions might be shorter). According to our intuition such a behavior can be attributed to the vehicles’ starting delay. The imposed condition that a vehicle can move to a customer only if a planned return time to the depot exceeds 90% of the working day’s span causes the planned routes to be relatively long so as to extend routing time beyond the assumed part of the working day. In the case of
470 clustered clients it might potentially be more efficient to serve only one cluster

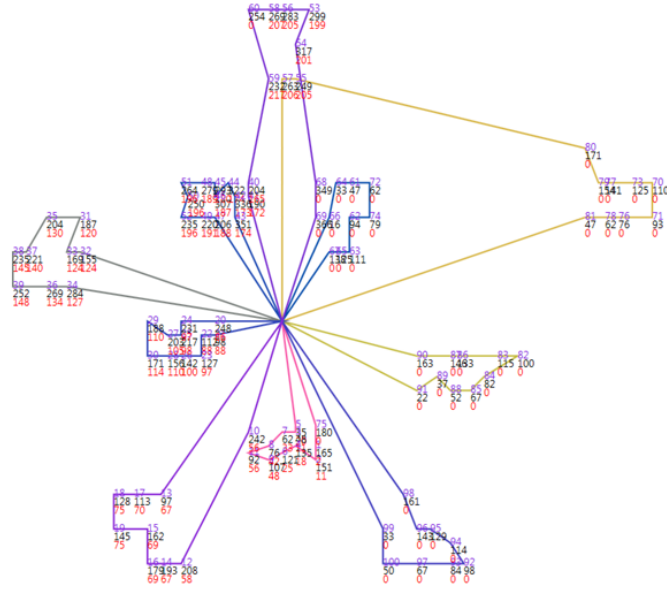


Figure 8: Route networks for instance c100bD.

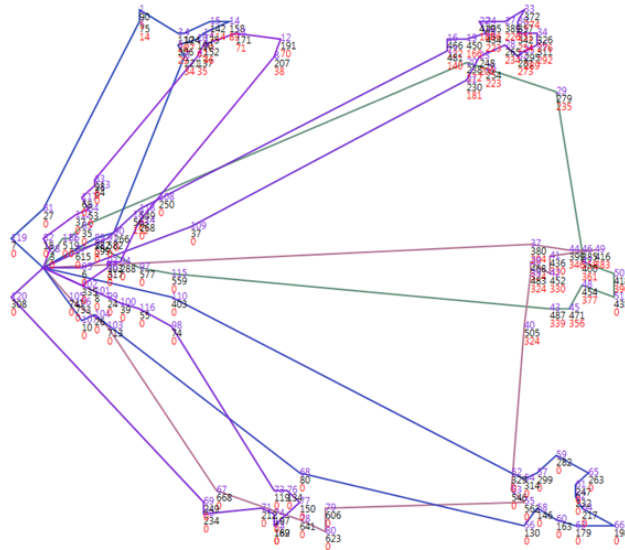


Figure 9: Route networks for instance c120D.

	M-VRPDR (10^7)		2MPSO (10^7)	
	Min	Avg	Min	Avg
c50D	524.61	548.10	552.47	591.29
c75D	852.95	885.00	878.93	904.12
c100D	860.56	913.81	874.20	920.84
c100bD	820.92	864.03	819.56	839.01
c120D	1189.06	1295.31	1056.28	1131.30
c150D	1083.79	1142.24	1096.53	1131.78
c199D	1377.26	1466.30	1362.84	1415.58
f71D	260.17	297.61	282.69	291.61
f134D	11815.95	12299.59	11755.58	12038.28
tai75aD	1656.12	1705.76	1682.90	1766.68
tai75bD	1350.28	1378.47	1404.29	1447.30
tai75cD	1355.41	1427.74	1406.59	1498.18
tai75dD	1376.42	1414.93	1415.79	1439.78
tai100aD	2093.63	2168.87	2155.42	2215.44
tai100bD	1990.99	2097.86	2022.13	2102.15
tai100cD	1421.50	1460.72	1446.10	1493.59
tai100dD	1631.63	1710.44	1690.32	1753.17
tai150aD	3226.51	3354.09	3298.91	3394.92
tai150bD	2847.08	2980.33	2887.88	2992.81
tai150cD	2427.53	2558.99	2462.96	2551.58
tai150dD	2737.37	2903.68	2886.12	2941.66

Table 2: The best and the average results of $M - VRPDR(10^7)$ and $2MPSO(10^7)$ for the considered benchmarks. The better of the two results in each category (Min, Avg) is bolded.

of clients per vehicle and return to the depot immediately after, regardless of the time of a day and available capacity left. In order to verify this hypothesis, 50 tests were performed for these two benchmarks with Sd times set to

	M-VRPDR	Best other	Algorithm	#FFE
c50D	524.61	552.47	<i>2MPSO</i> ₃ [22]	10 ⁷
c75D	866.45	877.30	<i>2MPSO</i> ₂ [22]	2 · 10 ⁶
c100D	873.10	874.20	<i>2MPSO</i> ₃ [22]	10 ⁸
c100bD	820.92	819.56	<i>2MPSO</i> ₃ [22]	10 ⁸
c120D	1199.64	1056.28	<i>2MPSO</i> ₃ [22]	10 ⁸
c150D	1083.79	1096.53	<i>2MPSO</i> ₃ [22]	10 ⁷
c199D	1376.26	1362.84	<i>2MPSO</i> ₃ [22]	10 ⁸
f71D	275.51	278.65	<i>2MPSO</i> ₃ [22]	10 ⁵
f134D	11817.66	11755.58	<i>2MPSO</i> ₃ [22]	10 ⁸
tai75aD	1658.13	1682.90	<i>2MPSO</i> ₃ [22]	10 ⁸
tai75bD	1351.06	1391.74	<i>2MPSO</i> ₃ [22]	2.2 · 10 ⁷
tai75cD	1388.13	1406.27	<i>TabuSearch</i> [20]	25 · 30sec
tai75dD	1395.30	1342.26	<i>MEMSO</i> [23]	10 ⁶
tai100aD	2122.92	2146.53	<i>2MPSO</i> ₂ [22]	2.2 · 10 ⁷
tai100bD	1990.99	2022.13	<i>2MPSO</i> ₃ [22]	10 ⁷
tai100cD	1419.89	1446.10	<i>2MPSO</i> ₃ [22]	10 ⁸
tai100dD	1651.28	1685.53	<i>2MPSO</i> ₂ [22]	2.2 · 10 ⁷
tai150aD	3343.54	3253.77	<i>MEMSO</i> [23]	10 ⁶
tai150bD	2957.16	2861.91	<i>MAPSO</i> [34]	10 ⁶
tai150cD	2430.91	2462.96	<i>2MPSO</i> ₃ [22]	10 ⁸
tai150dD	2742.35	2844.70	<i>2MPSO</i> ₂ [22]	2.2 · 10 ⁷

Table 3: Comparison of the best M-VRPDR results (2nd column) with the hitherto best-known literature solutions (3rd column) accomplished by the algorithm presented in the 4th column. Both results are attained with the same number of FFE (5th column) - defined in the cited papers. In one case (tai75cD), following [20], instead of the number of FFE, the time measure is used for methods' comparison. For each benchmark the better outcome is bolded.

475 0.0, 0.05, 0.1, 0.15, . . . , 0.85 hoping that the possibility to start the route earlier
would alleviate the problem of ineffective (packed close to the capacity limit)
routes. Unfortunately, all these values appeared to be weaker choices than 0.9
- the setting used in the main experiment. The main reason for that is a large
number of trucks which are at the algorithm’s disposal (in all tested benchmarks
480 this limit is set to 50, which is well beyond the practical needs). Having suffi-
cient number of spare vehicles there is no real need for any truck to optimize its
route in a way which would allow the vehicle to make two tours within a day.
Consequently, the trucks were leaving depot earlier than in the main experiment
but at the same time were much more “careless” about the route optimization,
485 having enough time and capacity to extend the solution in different ways. It
seems that the case of densely clustered customers’ distributions requires special
attention and we have put this issue on the top of our priority list.

Furthermore, visibly worse results were also obtained for benchmarks c150D
and c199D. While we could not trace any specific attributes of these sets other
490 than their size, we hypothesized that the number of iterations might have been
too small to allow the convergence to a good solution due to the higher (than in
other cases) number of customers. In order to verify this claim, we performed
additional tests for all four “resistant” benchmarks: c100bD, c120D, c150D,
c199D with doubled number of iterations. The results are presented in Table 4.
495 In the case of bigger benchmark sets (c150D and c199D) the results improved by
about 2.5% which seems to confirm our presumption. For the densely clustered
problems, however, the improvement is meaningless, about 1%.

6. Saliency of the memetic component

While encouraging experimental results, in particular the ability to find new
500 best literature results for a bunch of popular and widely-recognizable bench-
marks, give prospects for possible applicability and further development of the
M-VRPDR, from the research point of view the most pertinent question is re-
lated to the reasons of such a promising behavior.

	M-VRPDR with doubled iterations		M-VRPDR	
	Min	Avg	Min	Avg
c100bD	819.56	855.74	820.92	864.03
c120D	1192.35	1282.27	1189.06	1295.31
c150D	1071.78	1112.12	1083.79	1142.24
c199D	1365.26	1430.52	1377.26	1466.30

Table 4: Result of the algorithm with doubled numbers of iterations for 4 benchmarks for which M-VRPDR obtained the worst results.

Based on some number of preliminary tests it turned out that in the parametriza-
505 tion layer the crucial variable is the *starting delay* parameter, whose proper
setting is indispensable for efficient solving of VRPDR. In order to deeper in-
vestigate this issue additional tests were performed aiming at comparison of the
“pure” genetic approach (i.e. without memetic optimization) without consider-
ing the starting delay parameter, the pure genetic approach with starting delay
510 value set to 0.9 (as in the main experiment) and the M-VRPDR. The lack of
memetic optimization phase in both purely genetic implementations was com-
pensated by the increased number of iterations, so as to maintain approximately
the same number of FFE.

Table 5 presents comparison of results obtained by M-VRPDR and the two
515 genetic approaches (with and without considering the *Sd* parameter) based on
50 independent runs in each case. The importance of both tested factors (*start-*
ing delay parameter and memetic optimization) is clearly supported by the
results. The purely GA approach, without taking into account *Sd* factor, was
not a competitive approach for any of the considered benchmarks. In average it
520 yielded the solution 11.18% longer than those of the same GA implementation
which relied on the *starting delay*. This enhanced GA approach incidentally
appeared to be stronger than M-VRPDR in terms of best-found solution, but
in a more systematic measure, by means of the average solution length, it lost

	GA- <i>Sd</i>		GA+ <i>Sd</i>		M-VRPDR	
	Min	Avg	Min	Avg	Min	Avg
c50D	598.86	634.86	527.17	566.25	524.61	548.10
c75D	984.83	1059.16	865.70	898.40	852.95	885.00
c100D	1004.36	1061.87	868.94	940.20	860.56	913.81
c100bD	880.19	996.82	824.94	884.56	820.92	864.03
c120D	1282.32	1474.45	1222.00	1421.14	1189.06	1295.31
c150D	1377.09	1480.56	1089.41	1176.25	1083.79	1142.24
c199D	1762.94	1888.07	1436.00	1506.24	1377.26	1466.30
f71D	279.02	304.48	274.02	304.24	260.17	297.61
f134D	15480.35	16309.51	11795.55	12711.37	11815.95	12299.59
tai75aD	1758.56	1866.33	1668.75	1735.95	1656.12	1705.76
tai75bD	1480.91	1603.10	1352.04	1382.08	1350.28	1378.47
tai75cD	1516.50	1604.15	1372.42	1456.85	1355.41	1427.74
tai75dD	1456.45	1561.61	1393.19	1424.66	1376.42	1414.93
tai100aD	2185.52	2377.83	2103.70	2193.21	2093.63	2168.87
tai100bD	2136.29	2321.65	2049.49	2141.61	1990.99	2097.86
tai100cD	1564.66	1670.13	1425.17	1475.23	1421.50	1460.72
tai100dD	1801.75	1943.67	1661.63	1742.45	1631.63	1710.44
tai150aD	3541.84	3858.63	3241.59	3409.37	3226.51	3354.09
tai150bD	3109.13	3469.71	2845.46	3076.60	2847.08	2980.33
tai150cD	2738.08	2989.05	2442.11	2643.10	2427.53	2558.99
tai150dD	3055.80	3238.90	2810.29	2958.12	2737.37	2903.68

Table 5: Comparison of results obtained by M-VRPDR and the two genetic approaches (with and without considering the *Sd* parameter, denoted by GA+*Sd* and GA-*Sd*, respectively) based on 50 independent runs with a budget of 10^7 FFE in each case. Best results are bolded.

to M-VRPDR in all cases, with the average margin of 2.47%.

525 **7. Summary and conclusions**

This paper presents a memetic approach to solving the Vehicle Routing Problem with Dynamic Requests. The algorithm was tested on a well-established set of benchmarks and proved to be an effective and reliable method, capable of finding 13 new best-known results out of 21 tested problems, using the same numbers of fitness function evaluations. It is worth underlying that, except for
530 some parameter tuning, the method was not optimized for solving this particular set of benchmarks. Furthermore, the proposed algorithm can, in principle, be applied to solving other VRPDR benchmarks with no specific adjustments as the selected parameters seem to be universally useful (though certainly not
535 optimal in strict sense).

Our algorithm relies on problem encoding previously introduced in [20] and adopts memetic optimization scheme proposed in [9], however, both these factors are combined in a novel manner as parts of the newly-designed system and applied to the problem other than those considered in the source papers.
540 Furthermore, while memetic optimization is definitely an important part of the overall solution method, the paramount feature is the *starting delay* parameter which heuristically administers the dispatching times of the vehicles.

Additionally, a new way of knowledge transfer between consecutive partial solutions defined during the day (in subsequent time-slices) is introduced in this study and proved to be effective when combined with the proposed extensive
545 mutation operator which prevents the system from premature convergence or stagnation.

Our current research focus is on development of a meta-heuristic procedure, which - based on the analysis of particular data set (spatial and volume distributions of requests, their skewness and approximate number of clusters) -
550 would autonomously adjust the parameters of the method so as to increase its efficacy in solving a given benchmark set. Such a meta-heuristic system can, for instance, be implemented as a one-layer feed-forward network and trained on an ensemble of benchmarks, taking the statistical parameters of the data set as in-

555 puts. Special focus will be put on the case of densely clustered data sets, which appeared to be the most demanding for the current system implementation. We hope that due to intrinsic nonlinearity of neural networks' approximation the proposed meta-approach will further strengthen the system's performance.

Acknowledgment

560 The research was financed by the National Science Centre in Poland, grant number DEC-2012/07/B/ST6/01527. The authors would like to thank Michal Okulewicz for his helpful comments.

Appendix A

The appendix presents statistical characteristics of the baseline M-VRPDR 565 (10^7) results (Table 6) and two exemplar convergence graphs (Figures 10 and 11), respectively for c100bD and tai150aD benchmark sets.

The results presented in Table 6 show that the method is reliable (repeatable), as for all benchmarks the standard deviation is kept within reasonable limits compared to the average solution. The greatest spread of outcomes (in 570 per cent points) can be observed for f71D (4.79%) and tai150cD (4.09%), while the most consistent results are obtained in the case of f134D (only 1.46%) and tai75bD (1.51%). Overall, the worst solutions (column Max) are within the 11.21% margin (achieved for tai150aD) from the average results across all benchmarks, but can be as low as 3.01% for f134D or 3.43% for tai75bD.

575 References

- [1] G. B. Dantzig, R. Ramser, The Truck Dispatching Problem, *Management Science* 6 (1959) 80–91.
- [2] L. M. Gambardella, ric Taillard, G. Agazzi, Macs-vrptw: A multiple ant colony system for vehicle routing problems with time windows, in: *New Ideas in Optimization*, McGraw-Hill, 1999, pp. 63–76. 580

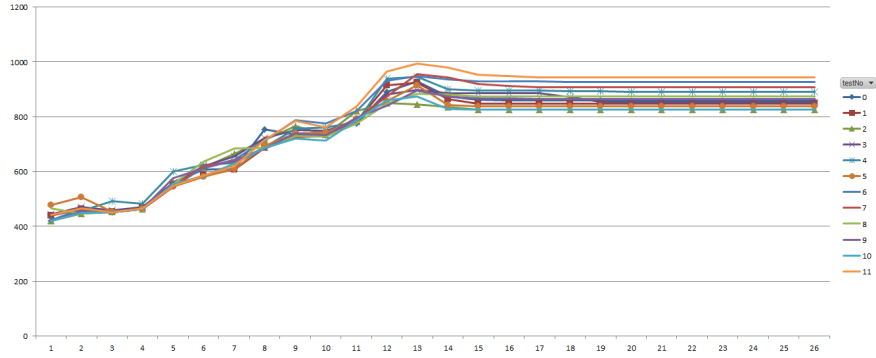


Figure 10: The convergence graphs for 12 independent algorithm's runs for the c100bD benchmark set. The x-axis represents time (time slices) and the y-axis - the length of the currently committed tour. It can be seen from the figure that the experiments are fairly repeatable. After the *cut-off time* (time slice #13) only local route optimization takes place.

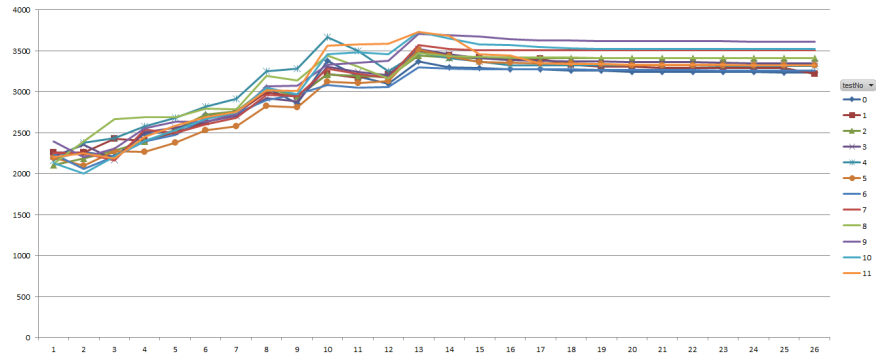


Figure 11: The convergence graphs for 12 independent algorithm's runs for the tai150aD benchmark set. The x-axis represents time (time slices) and the y-axis - the length of the currently committed tour. It can be seen from the figure that the experiments are fairly repeatable. After the *cut-off time* (time slice #13) only local route optimization takes place.

	Min	Avg	Max	St_dev	St_dev/Avg
c50D	524.61	548.10	582.09	17.49	3.19%
c75D	852.95	885.00	944.83	22.14	2.50%
c100D	860.56	913.81	999.41	29.98	3.28%
c100bD	820.92	864.03	927.51	25.93	3.00%
c120D	1189.06	1295.31	1407.31	49.67	3.83%
c150D	1083.79	1142.24	1234.75	38.18	3.34%
c199D	1377.26	1466.30	1596.62	45.08	3.07%
f71D	260.17	297.61	324.61	14.25	4.79%
f134D	11815.95	12299.59	12669.69	180.06	1.46%
tai75aD	1656.12	1705.76	1797.22	34.22	2.01%
tai75bD	1350.28	1378.47	1425.69	20.88	1.51%
tai75cD	1355.41	1427.74	1538.73	37.90	2.65%
tai75dD	1376.42	1414.93	1481.04	24.23	1.71%
tai100aD	2093.63	2168.87	2357.59	53.48	2.47%
tai100bD	1990.99	2097.86	2195.63	55.92	2.67%
tai100cD	1421.50	1460.72	1564.04	31.02	2.12%
tai100dD	1631.63	1710.44	1820.74	49.64	2.90%
tai150aD	3226.51	3354.09	3730.07	106.00	3.16%
tai150bD	2847.08	2980.33	3134.90	74.73	2.51%
tai150cD	2427.53	2558.99	2828.03	104.55	4.09%
tai150dD	2737.37	2903.68	3063.57	67.63	2.33%

Table 6: Detailed results of the M-VRPDR method for all 21 benchmarks with a budget of 10^7 FFE in each test.

- [3] A. H. Michel Gendreau, G. Laporte, A tabu search heuristic for the vehicle routing problem, *Management Science* 40 (10) (1994) 276–1290.
- [4] Y. Wu, P. Ji, T. Wang, An empirical study of a pure genetic algorithm to solve the capacitated vehicle routing problem, *ICIC Express Letters* 2

585

(2008) 41–45.

- [5] I. H. Osman, Metastrategy simulated annealing and tabu search algorithms for the vehicle routing problem, *Annals of Operations Research* 41 (4) (1993) 421–451.
- [6] J. Mańdziuk, C. Nejman, UCT-based approach to Capacitated Vehicle Routing Problem, in: *Artificial Intelligence and Soft Computing*, Vol. 9120 of *Lecture Notes in Computer Science*, Springer Berlin Heidelberg, 2015, pp. 679–690.
- [7] N. Wilson, N. Colvin, Computer control of the rochester dial-a-ride system, Tech. Rep. R77-31, Department of Civil Engineering, Massachusetts Institute of Technology, Cambridge, Massachusetts.
- [8] P. Kilby, P. Prosser, P. Shaw, Dynamic VRPs: A Study of Scenarios, accessed: 2015-09-01 (1998).
URL <http://www.cs.strath.ac.uk/~apes/apereports.html>
- [9] X. Chen, L. Feng, Y. Ong, A self-adaptive memeplexes robust search scheme for solving stochastic demands vehicle routing problem, *Int. J. Systems Science* 43 (7) (2012) 1347–1366.
- [10] L. Wen, B. atay, R. Eglese, Finding a minimum cost path between a pair of nodes in a time-varying road network with a congestion charge, *European Journal of Operational Research* 236 (3) (2014) 915 – 923.
- [11] J. Mańdziuk, M. Świechowski, UCT method in stochastic transportation problems, accessed: 2015-09-01 (*Unpublished results*).
URL <http://www.mini.pw.edu.pl/~mandziuk/WORK/UCT-DVRP.pdf>
- [12] D. Tas, M. Gendreau, N. Dellaert, T. van Woensel, A. de Kok, Vehicle routing with soft time windows and stochastic travel times: A column generation and branch-and-price solution approach, *European Journal of Operational Research* 236 (3) (2014) 789 – 799.

610

- [13] D. Cattaruzza, N. Absi, D. Feillet, T. Vidal, A memetic algorithm for the multi trip vehicle routing problem, *European Journal of Operational Research* 236 (3) (2014) 833 – 848.
- 615 [14] M. M. Abdulkader, Y. Gajpal, T. Y. ElMekkawy, Hybridized ant colony algorithm for the multi compartment vehicle routing problem, *Applied Soft Computing* 37 (2015) 196 – 203.
- [15] K. Ghoseiri, S. F. Ghannadpour, Multi-objective vehicle routing problem with time windows using goal programming and genetic algorithm, *Appl. Soft Comput.* 10 (4) (2010) 1096–1107.
- 620 [16] R. Masson, S. Ropke, F. Lehud, O. Pton, A branch-and-cut-and-price approach for the pickup and delivery problem with shuttle routes, *European Journal of Operational Research* 236 (3) (2014) 849 – 862.
- [17] P. Toth, D. Vigo, Special issue on vehicle routing and distribution logistics, *European Journal of Operational Research* 236 (3) (2014) IFC –.
- 625 [18] B. Eksioglu, A. V. Vural, A. Reisman, The vehicle routing problem: a taxonomic review, *Computers & Industrial Engineering* 57 (4) (2009) 1472 – 1483.
- [19] R. Montemanni, L. Gambardella, A. Rizzoli, A. Donati, A new algorithm for a dynamic vehicle routing problem based on ant colony system, *Journal of Combinatorial Optimization* 10 (2005) 327–343.
- 630 [20] F. T. Hanshar, B. M. Ombuki-Berman, Dynamic vehicle routing using genetic algorithms, *Applied Intelligence* 27 (1) (2007) 89–99.
- [21] M. Okulewicz, J. Mańdziuk, Application of Particle Swarm Optimization Algorithm to Dynamic Vehicle Routing Problem, in: *Artificial Intelligence and Soft Computing*, Vol. 7895 of *Lecture Notes in Computer Science*, Springer Berlin Heidelberg, 2013, pp. 547–558.
- 635

- [22] M. Okulewicz, J. Mańdziuk, A two-phase multi-swarm algorithm for solving dynamic vehicle routing problem, accessed: 2015-09-01 (*Unpublished results*).
640 URL <http://www.mini.pw.edu.pl/~mandziuk/WORK/2MPSO.pdf>
- [23] M. R. Khouadjia, E.-G. Talbi, L. Jourdan, B. Sarasola, E. Alba, Multi-environmental cooperative parallel metaheuristics for solving dynamic optimization problems, *Journal of Supercomputing* 63 (3) (2013) 836–853.
- 645 [24] M. R. Khouadjia, B. Sarasola, E. Alba, L. Jourdan, E.-G. Talbi, A comparative study between dynamic adapted PSO and VNS for the vehicle routing problem with dynamic requests, *Applied Soft Computing* 12 (4) (2012) 1426–1439.
- [25] J. Mańdziuk, S. Zadrożny, K. Wałędzik, M. Okulewicz, M. Świechowski,
650 Adaptive metaheuristic methods in dynamically changing environments, accessed: 2015-09-01 (2015).
URL <http://www.mini.pw.edu.pl/~mandziuk/dynamic/>
- [26] Y. S. Ong, M. H. Lim, X. S. Chen, Research frontier: Memetic computation - past, present & future, *IEEE Computational Intelligence Magazine* 5 (2)
655 (2010) 24–36.
- [27] X. S. Chen, Y. S. Ong, M. H. Lim, K. C. Tan, A multi-facet survey on memetic computation, *IEEE Transactions on Evolutionary Computation* 15 (5) (2011) 591–607.
- [28] F. Neri, C. Cotta, Memetic algorithms and memetic computing optimization: A literature review, *Swarm and Evolutionary Computation* 2 (2012)
660 1–14.
- [29] A. K. Raymond Kwan, A. Wren, Evolutionary driver scheduling with relief chains, *Evolutionary Computation* 9 (4) (2001) 445–460.

- [30] X. Chen, Y. Ong, M. H. Lim, Cooperating memes for vehicle routing problems, *International Journal of Innovative Computing, Information and Control* 7 (2011) 1–10.
- [31] N. Christofides, J. E. Beasley, The period routing problem, *Networks* 14 (2) (1984) 237–256.
- [32] M. L. Fisher, R. Jaikumar, A generalized assignment heuristic for vehicle routing, *Networks* 11 (2) (1981) 109–124.
- [33] É. D. Taillard, Parallel iterative search methods for vehicle routing problems, *Networks* 23 (8) (1993) 661–673.
- [34] M. R. Khouadjia, E. Alba, L. Jourdan, E.-G. Talbi, Multi-Swarm Optimization for Dynamic Combinatorial Problems: A Case Study on Dynamic Vehicle Routing Problem, in: *Swarm Intelligence*, Vol. 6234 of *Lecture Notes in Computer Science*, Springer, Berlin / Heidelberg, 2010, pp. 227–238.

Vitae



Jacek Mańdziuk PhD, DSc. is Associate Professor at Faculty of Mathematics and Information Science, Warsaw University of Technology, Head of Division of Artificial Intelligence and Computational Methods and Head of Doctoral Programme in Computer Science. In 2011 he was awarded the title of Professor Titular.

He is the author of 3 books and 100+ research papers, an Associate Editor of several journals including IEEE Transactions on Computational Intelligence and AI in Games. He is a recipient of the Senior Fulbright Advanced Research Award.

His research interests include application of CI to games, dynamic optimization, human-machine cooperation, financial modeling, and development of general-purpose human-like learning and problem-solving methods which involve intuition, creativity and multitasking.

690



Adam Żychowski received his B.Sc. and M.Sc. degrees in Computer Science from the Faculty of Mathematics and Information Science, Warsaw University of Technology, Warsaw, Poland in 2014 and 2015, respectively.

His research interests include Computational Intelligence methods and their application to solving complex, real-life problems.